

## DECLARATION OF PERFORMANCE

in accordance with EU Construction Products Regulation (CPR) no 305/2011  
and Commission Delegated Regulation (EU) No 574/2014

No. DoP-DE-014652 001

1. *Unique identification code of the product type:*  
014652 001 (weber.fug 880)  
TYPE F – EXT-INT according to EN 15651-1;  
TYPE G according to EN 15651-2;  
TYPE S according to EN 15651-3
2. *Intended use/s:*  
Sealant for facade for interior and exterior application.  
Sealant used for sealing glazing applications.  
Sealants used for sanitary applications.
3. *Manufacturer:*  
Saint-Gobain Weber GmbH  
Willstätterstraße 60  
40549 Düsseldorf/Germany  
<https://www.de.weber>
4. *Authorised representative:*  
*Not applicable*
5. *System/s of AVCP:*  
System 3: for essential characteristics  
System 3: for reaction to fire
6. *Harmonised standard:*  
EN 15651-1:2012: Type F - EXT-INT: CLASS 25LM  
EN 15651-2:2012: Type G: CLASS 25LM  
EN 15651-3:2012: Type S: CLASS XS1

*Notified body:*

IFT Rosenheim GmbH, NB 0757 has carried out Determination of the Product Type under system 3.

7. Declared performance/s:

**EN 15651-1:2012**

Essential characteristics	Performance
Reaction to fire	Class E
Release dangerous chemicals	NPD
Water and air tightness	
Resistance to flow	≤ 3 mm
Loss of volume	≤ 10%
Elastic recovery	≥ 70%
Secant modulus at 23°C (N/mm <sup>2</sup> )	≤ 0,4
Secant modulus at -20°C (N/mm <sup>2</sup> )	≤ 0,6
Secant modulus at -30°C (N/mm <sup>2</sup> )	NPD
Tensile properties at maintained extension	NF
Tensile properties at maintained extension at -30°C	NPD
Adhesion/cohesion at variable temperatures	NF
Adhesion/cohesion at maintained extension after water immersion	NF
Elongation at break	≥ 25%
Durability	Passed

*Conditioning:*  
Method A

*Test substrate:*  
Aluminium  
Mortar

Declared performance/s:

**EN 15651-2:2012**

Essential characteristics	Performance
Reaction to fire	Class E
Release dangerous chemicals	NPD
Water and air tightness	
Resistance to flow	≤ 3 mm
Loss of volume	≤ 10%
Secant modulus at 23°C (N/mm <sup>2</sup> )	≤ 0,4
Secant modulus at -20°C (N/mm <sup>2</sup> )	≤ 0,6
Secant modulus at -30°C (N/mm <sup>2</sup> )	NPD
Tensile properties at maintained extension at -30°C	NPD
Tensile properties at maintained extension	NF
Adhesion/cohesion at variable temperatures	NF
Adhesion/cohesion at maintained extension after water immersion	NF
Adhesion/cohesion after exposure to heat, water and artificial light	NF
Resistance to compression (N/mm <sup>2</sup> )	0,26
Durability	Passed

Conditioning:

Method A

Test substrate:

Aluminium

Glass

Declared performance/s:

**EN 15651-3:2012**

Essential characteristics	Performance
Reaction to fire	Class E
Release dangerous chemicals	NPD
Water and air tightness	
Resistance to flow	≤ 3 mm
Loss of volume	≤ 10%
Tensile properties at maintained extension	NF
Adhesion/cohesion at variable temperatures	NF
Adhesion/cohesion at maintained extension after water immersion	NF
Microbiological growth	0
Durability	Passed

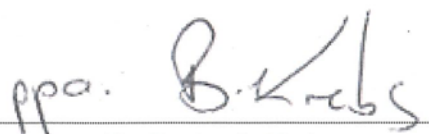
Conditioning:  
Method A

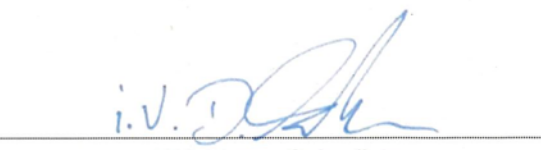
Test substrate:  
Aluminium  
Glass

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

Saint-Gobain Weber GmbH, Düsseldorf, 11.03.2025

ppa.   
Dr. Benjamin Krebs

i.v.   
Dirk Taron-Schreiber